


The Terminal That Wins Every Day, Every Time

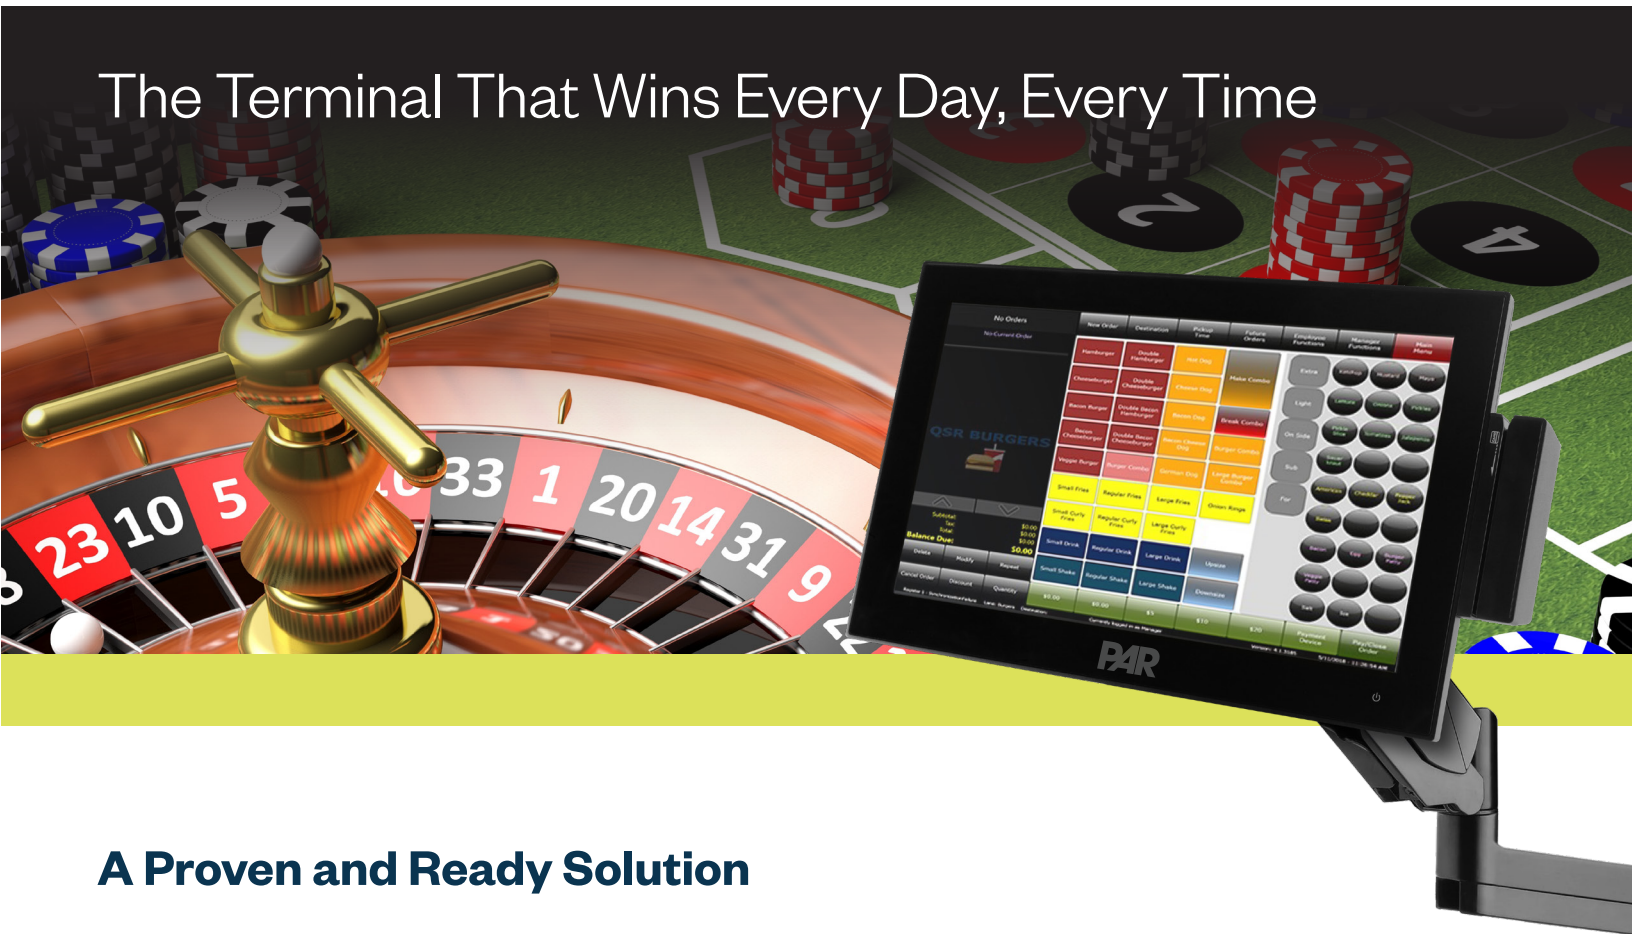

A Proven and Ready Solution

With over 40+ years in the POS terminal industry, PAR has been helping casino brands provide the best guest and staff experience with reliable hardware. The EverServ 650 is PAR's flagship terminal for brands of all shapes and sizes seeking an easy-to-use and versatile point-of-sale solution.

PAR's EverServ 650 is the perfect solution, whether you require it as a POS terminal or a countertop self-service kiosk. With its versatile capabilities, the EverServ 650, meets your hardware needs.

- Fast, powerful, and secure to power any system
- Lightweight and low-profile to suit any environment
- Rugged and durable for high-traffic conditions

PAR's EverServ 650 point-of-sale solutions feature:

- 15" standard or 15.6" widescreen with Projected Capacitive Touch (PCAP) screen
- Latest powerful Intel® Kaby Lake Celeron Processor
- PAR's 40+ years of POS terminal engineering and experience
- Access to PAR services, extended warranties, advanced exchange, and a nationwide network of on-site service technicians.
- Integrates seamlessly with other service providers as well as PAR PAY and PAR Payment services to fit your needs.

EverServ 650 Technical Specifications

Specifications

Processor	Intel® Kaby Lake Celeron 3965U. 2M Cache. 2.20 GHz
System Memory	4GB (Up to 32GB)
System Storage	64GB or 128GB SSD
Supported OS	Windows 10
Power	100-240V (External Power Brick) Standard: DC Output 12V 5.0Amp Widescreen: DC Output 24V 6.35Amp
Brightness	300 nits Projected Capacitive Touch (PCAP) screen
Operating Temperatures	41°F to 104°F (5°C to 40°C) at 10% to 90% humidity
Storage Temperatures	0°F to 140°F (-18°C to 60°C) at 5% to 90% humidity

Physical Dimensions

Dimension (WxDxH)	14.3 x 11.2 x 8.3 in 15.6 x 12.9 x 8.3 in
Display	Standard: 15" TFT LED Backlight: 1024 x 768 Resolution Widescreen: 15.6" TFT LED Backlight: 1366 x 768 Resolution

Connectivity

Display Port	1 x VGA (With 12V power output)
USB Port	6 Total (2 in cable well, 4 on panel)
Serial Port	3 in Cable Well
COM1	5V/12V DB9 (DB9 Port support via RJ45 to DB9 adapter sold separately)
COM2 & 3	RJ-45, Full Signal
DB9 Port	Requires RJ45 to DB9 adapter sold separately
Ethernet Port	RJ-45 10/100/1000 BaseT
Audio	Line-out
Power	DC-IN 1 (4pins connector)
24V Cash Drawer Port	1 x RJ12 (support for dual drawers via adapter cable)

Options

K6341	MSR
K6342	Biometric Reader
K8550-04	WiFi
K6150B, K3710, K3711A	VESA wall mount
K6622, K6622T, K6624, K6624T	Rear 10" and 12" customer displays (touch and non-touch monitors)
K6620	2 x 20" line display